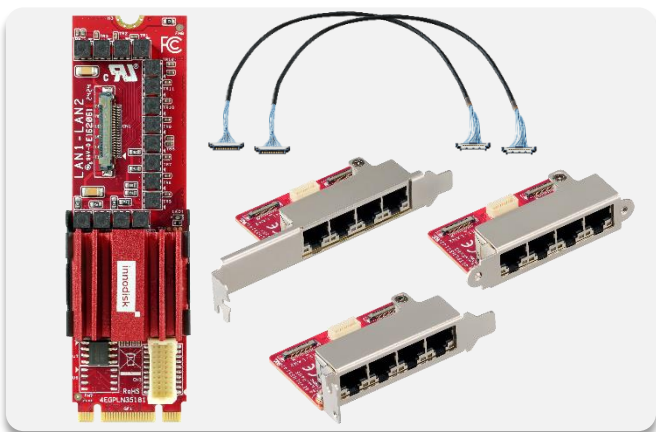
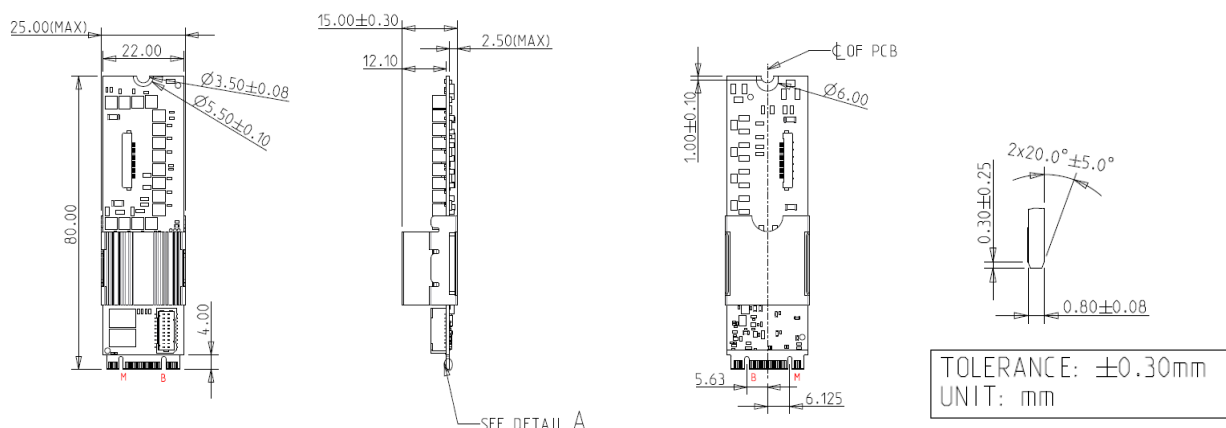


**Features**

- Intel i350 controller, support four GbE LAN ports
- Compact 1x4 RJ45 board support PCIe low-profile bracket
- Micro coaxial cable for flexible cable route and better signal quality
- Optional terminal mounting hole or bracket for daughter board
- Complies with IEC 60950-1:2005 + A1: 2009 + A2:2013 500V HiPOT protection
- 30μ" golden finger, 3-year warranty
- Industrial design, manufactured in innodisk Taiwan

Mechanical Drawing**Specifications****Headquarters (Taiwan)**

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan

Tel: +886-2-7703-3000
Email: sales@innodisk.com

Branch Offices:**USA**

usasales@innodisk.com
+1-510-770-9421

Europe

eusales@innodisk.com
+31-40-3045-400

Japan

jpsales@innodisk.com
+81-3-6667-0161

China

sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2024 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

October 14, 2024

Form-Factor	M.2 2280 B-M key
Input I/F	PCI Express 2.1 x 2
Output I/F	GbE LAN x 4
Output Connector	RJ45 x 4
Power Consumption	3.8W (3.3V, 1151mA)
Dimension (WxLxH)	Main board: 22 x 80 x 15.3 mm Daughter board: 41.9 x 64.27 x 21 mm
Temperature	Operation: 0°C ~ +55°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	Please download driver from Intel official website. Windows: XP(32bit), 7/8/8.1/10(32/64bit), 11 Linux: kernel 2.4 series, 2.6.x, 3.x version and above

Order Information


EGPL-G401-C1 (Mounting hole)

EGPL-G401-C2 (PCIe low-profile bracket)


EGPL-G401-C3 (PCIe standard bracket)

M.2 2280 to four GbE LAN module

EGPL-G401-C1 Daughter Board with Mounting Hole

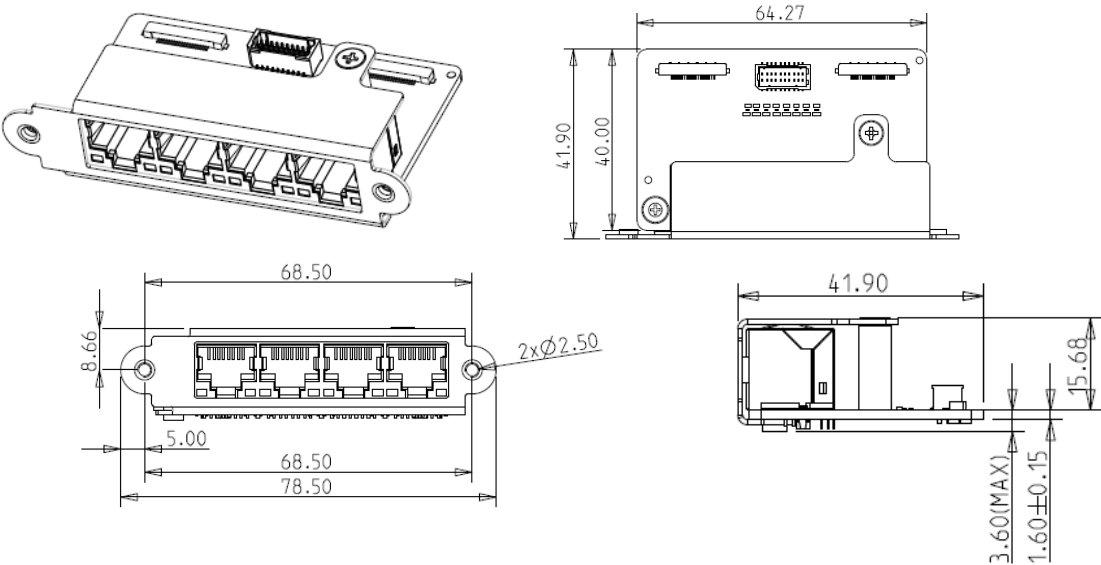

EGPL-G401-C2 Daughter Board with PCIe Low-profile Bracket

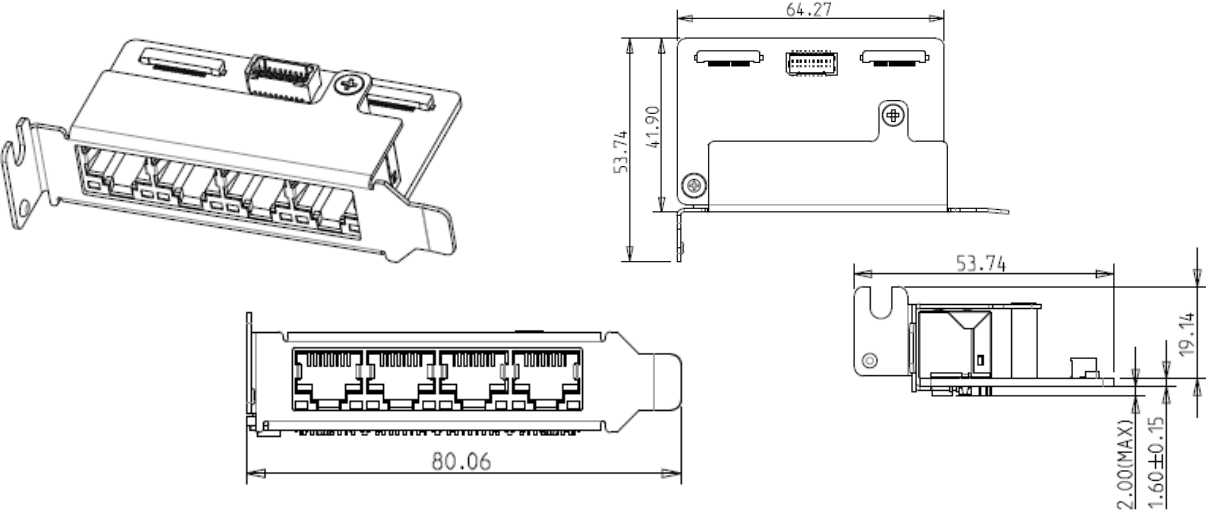

EGPL-G401-C3 Daughter Board with PCIe Standard Bracket

