

Datasheet

Industrial SD Card

3TE4

- Compliant with SD 6.1/ SD 3.0/ SD 2.0 interface
- Support Class 10 with UHS-III
- Adopt 3D TLC NAND flash
- High performance
- Targeted for portable and stationary applications
- SMART function supported



Introduction

Innodisk 3TE4 is an industrial-grade SD card solution with an integrated industrial controller, which is designed for embedded applications. With enhanced flash technologies and a powerful configurable LDPC ECC engine, SD 3TE4 can achieve high-speed data transfer rates.

Innodisk industrial SD 3TE4 provides a wide range of capacities from 32GB to 256GB with TLC NAND Flash, and is fully compliant with SD3.0 and SD2.0 specifications.

Innodisk industrial SD 3TE4 are specifically designed for industrial PC and embedded applications for high performance. With its low power consumption and the above mentioned features, Innodisk industrial SD 3TE4 can be applied for industrial automation, SBC (single-board computer), medical equipment, infotainment, and mobile applications.

Industrial SD Card 3TE4

Contact us for more information
about the Industrial SD Card 3TE4.

Innodisk is a service-driven provider of industrial embedded flash storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)


5F., No. 237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-40-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2021 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Diagram

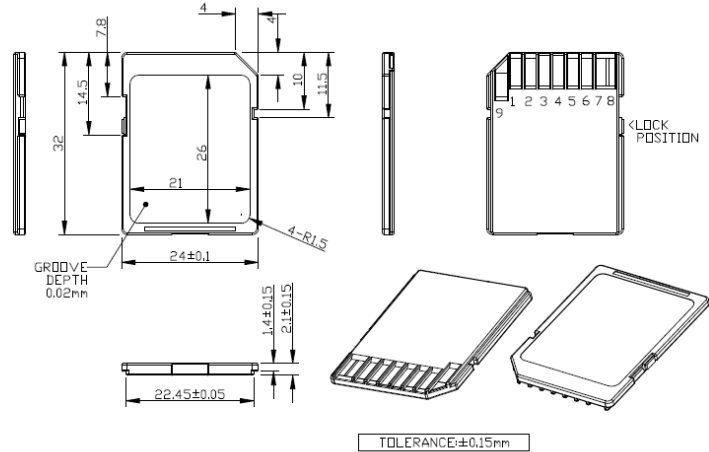

Specifications

Interface	SD 6.1/ SD 3.0
Flash Type	3D TLC
Capacity	32GB~256GB
Max. Channels	1
Sequential R/W (MB/sec, max.)	90/80
Max. Power Consumption	0.7W
Thermal Sensor	-
Extended DRAM buffer	-
H/W Write Protect	√
ATA Security	-
S.M.A.R.T.	-
Dimension (WxLxH)	24 X 32.0 X 2.1 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -40°C ~ +85°C MTBF: 3 million hours Endurance: 3,000 P/E cycles

Ordering Information

Operation Temp.	32GB	64GB	128GB	256GB
Extend Grade (-25°C ~ +85°C)	DESDC-32GS06EE1SL	DESDC-64GS06%E1SL	DESDC-A28S06%E1SL	DESDC-B56S06%E1SL
Industrial Grade (-40°C ~ +85°C)	DESDC-32GS06EW1SL	DESDC-64GS06%W1SL	DESDC-A28S06%W1SL	DESDC-B56S06%W1SL

%: G: 96 layers 3D TLC; K: 112 layers 3D TLC

32GB is only supported by 64 layers 3D TLC.

innodisk

www.innodisk.com